


PK 18502 SH


HIGH PERFORMANCE

Proven in long term applications.


A

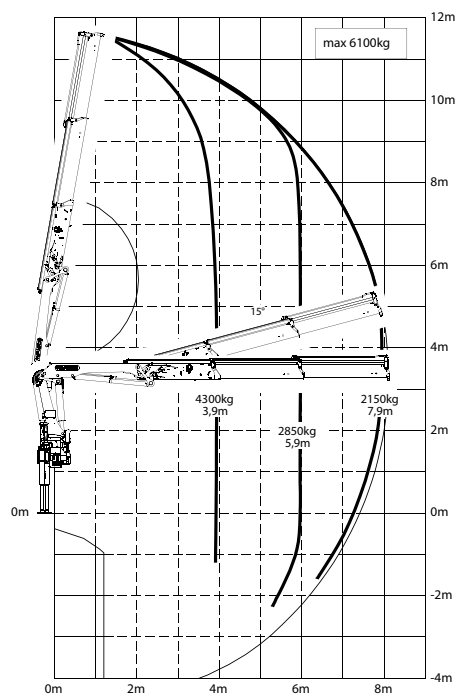


B

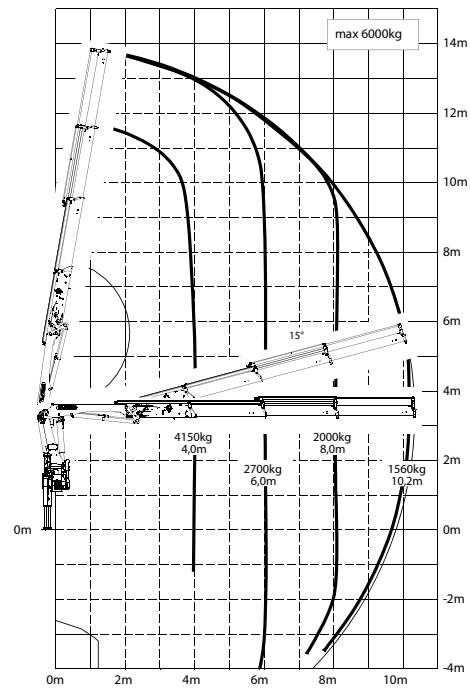

D

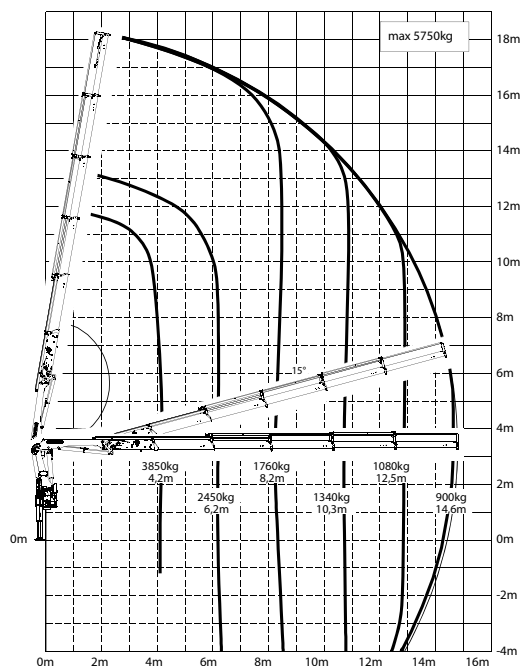


E

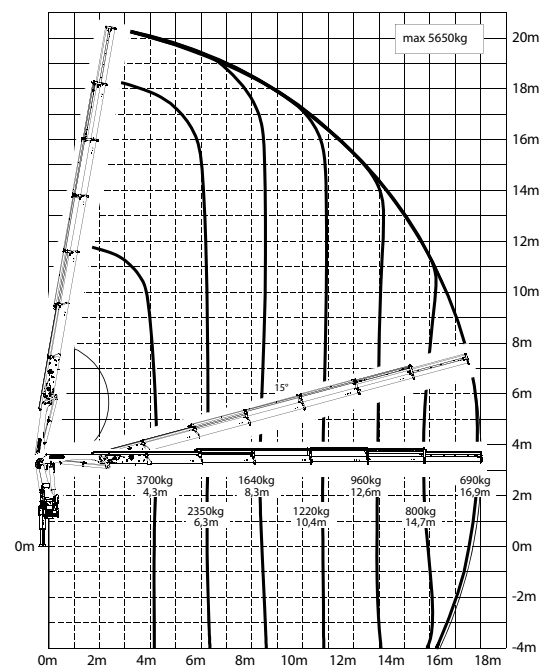

The outreaches stated are with a boom angle of 20° and are therefore not the maximum.

Lifting capacities

C

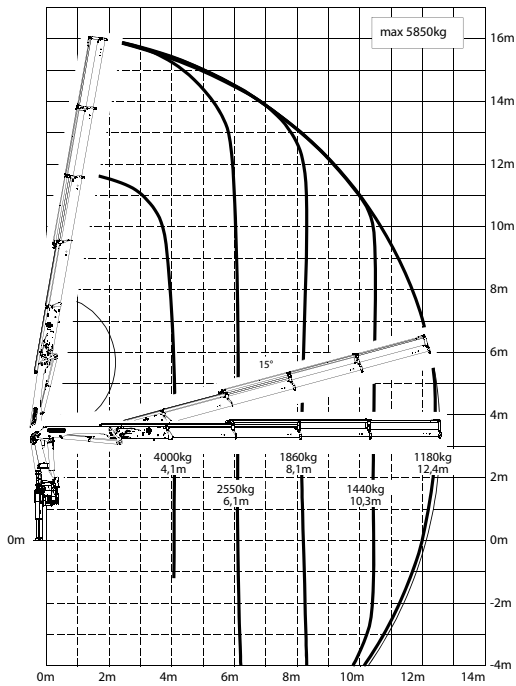

max.		6100 kg	13500 lbs	A
3.9 m	13 ft	4300 kg	9500 lbs	
5.9 m	20 ft	2850 kg	6300 lbs	
7.9 m	26 ft	2150 kg	4700 lbs	


max.		6000 kg	13200 lbs	B
4.0 m	13 ft	4150 kg	9100 lbs	
6.0 m	20 ft	2700 kg	6000 lbs	
8.0 m	26 ft	2000 kg	4400 lbs	
10.2 m	33 ft	1560 kg	3450 lbs	
12.4 m*	41 ft	1220 kg	2660 lbs	
14.6 m*	48 ft	970 kg	2140 lbs	

max.		5850 kg	12900 lbs	C
4.1 m	13 ft	4000 kg	8800 lbs	
6.1 m	20 ft	2550 kg	5700 lbs	
8.1 m	27 ft	1860 kg	4100 lbs	
10.3 m	34 ft	1440 kg	3200 lbs	
12.4 m	41 ft	1180 kg	2600 lbs	
14.6 m*	48 ft	950 kg	2080 lbs	
16.8 m*	55 ft	780 kg	2020 lbs	

max.		5750 kg	12700 lbs	D
4.2 m	14 ft	3850 kg	8500 lbs	
6.2 m	20 ft	2450 kg	5400 lbs	
8.2 m	27 ft	1760 kg	3850 lbs	
10.3 m	34 ft	1340 kg	2950 lbs	
12.5 m	41 ft	1080 kg	2350 lbs	
14.6 m	48 ft	900 kg	2000 lbs	
16.8 m*	55 ft	740 kg	1640 lbs	
18.8 m*	62 ft	620 kg	1380 lbs	

max.		5650 kg	12500 lbs	E
4.3 m	14 ft	3700 kg	8100 lbs	
6.3 m	21 ft	2350 kg	5100 lbs	
8.3 m	27 ft	1640 kg	3600 lbs	
10.4 m	34 ft	1220 kg	2700 lbs	
12.6 m	41 ft	960 kg	2150 lbs	
14.7 m	48 ft	800 kg	1760 lbs	
16.9 m	55 ft	690 kg	1520 lbs	
18.9 m*	62 ft	580 kg	1280 lbs	


C PJ060B JV2

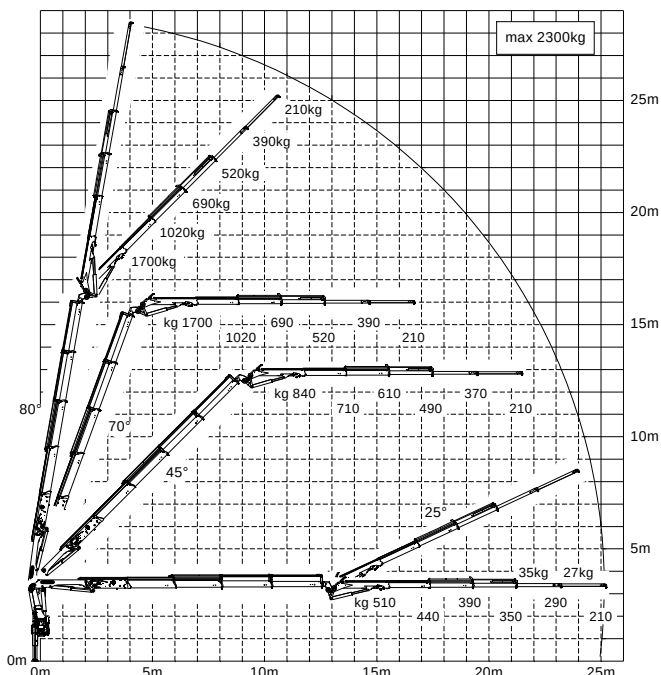


*mechanical extension

PERFECT DIMENSIONS

EXTENSION BOOM VARIATIONS

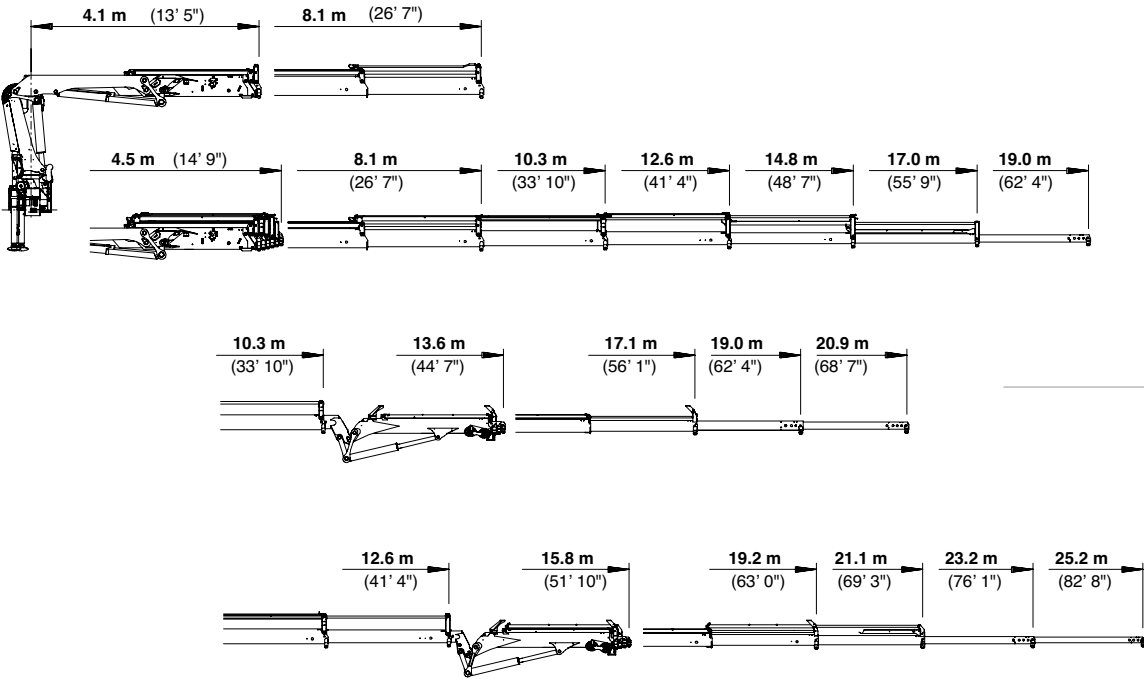

DIMENSIONS

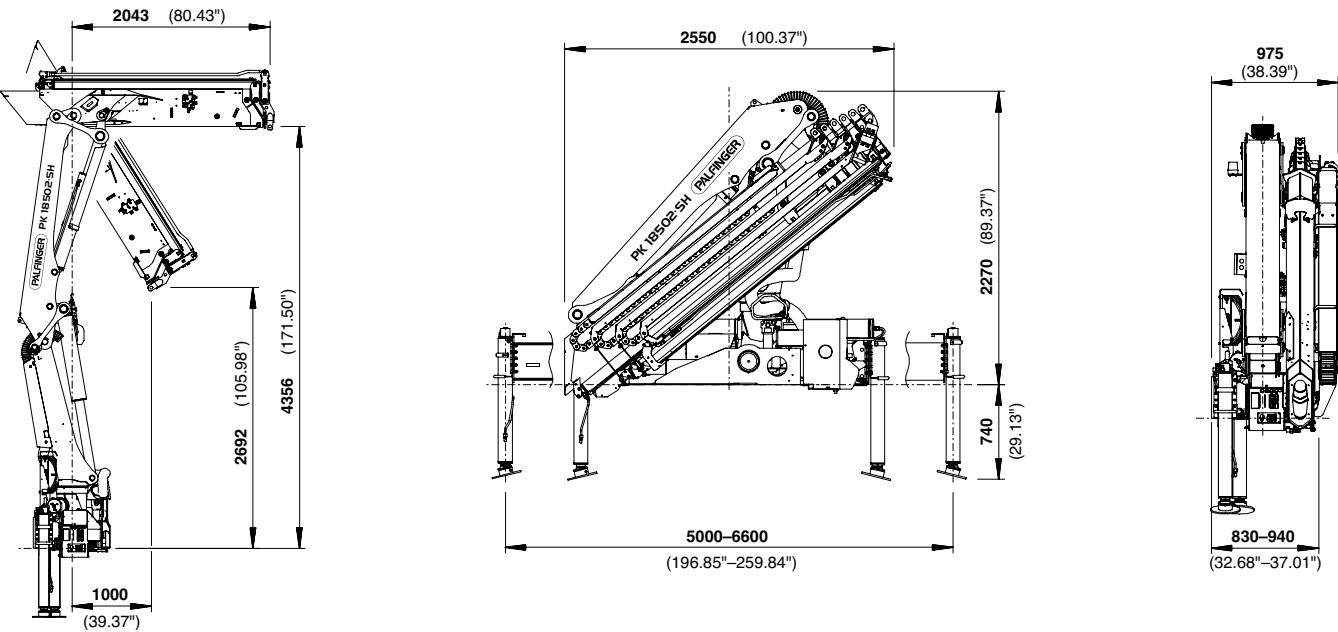

Technical specifications

EN 12999 HC1 HD5/B3

PK 18502 SH

Max. lifting moment	17.6 mt/172.7 kNm	127370 ft.lbs
Max. lifting capacity	6200 kg/60.8 kN	13670 lbs
Max. hydraulic outreach	17.0 m	55' 9"
Max. manual outreach	19.0 m	62' 4"
Max. outreach (with fly-jib)	25.1 m	82' 4"

B PJ060A JV2

Slewing angle	420°	
Slewing torque	2.0 mt/19.6 kNm	14450 ft.lbs
Stabilizer spread (std./max.)	5.0 m / 6.6 m	16' 5" / 21' 8"
Fitting space required (std.)	0.83 m	2' 9"
Width folded	2.51 m	8' 3"
Max. operating pressure	365 bar	5293 psi
Recommended pump capacity	from 60 l/min to 80 l/min	15.9 US gal./min 21.1 US gal./min

C PJ060B JV2

Dead weight (std.)	1890 kg	4167 lbs
--------------------	---------	----------